


Caterpillar,
il vostro partner per la movimentazione.





Montante, prestazioni e portate

Montante	EP20 • EP25				EP20	EP25
	h3 mm	h1 mm	h4 mm	h2 / h5 mm	Q @ c = 500 mm kg	Q @ c = 500 mm kg
Simplex	3000	1989 *	4055	100	2000	2500
	3300	2139 *	4355	100	2000	2500
	3740	2404	4795	100	2000	2500
	4100	2584	5155	100	2000	2500
	4500	2794	5555	100	2000	2500
	5000	3044	6055	100	1950	2500
	5500	3294	6555	100	1875	2400
Duplex	6000	3544	7055	100	1575	1700
	3000	1989 *	4055	934	2000	2500
	3300	2139 *	4355	1084	2000	2500
	3700	2404	4755	1349	2000	2500
Triplex	4020	2584	5075	1529	2000	2500
	3730	1799 *	4785	744	2000	2500
	4030	1899 *	5085	844	2000	2500
	4300	1989 *	5355	934	2000	2500
	4750	2139 *	5805	1084	1925	2475
	5060	2259	6115	1204	1875	2425
	5500	2404	6555	1349	1800	2325
	5990	2584	7045	1529	1675	2075
	6500	2844	7555	1789	1475	1575
	7000	3044	8055	1989	1100	1200

* piú basso del tettuccio di protezione

Portata con differenti baricentri del carico

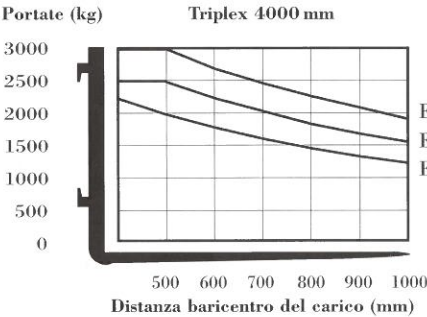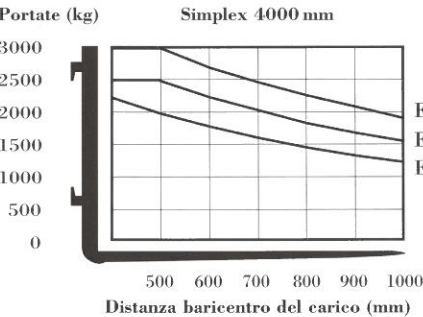

Compartimento Batteria		EP20	EP25	EP30
Lunghezza (min)	mm	725	725	870
Larghezza (min)	mm	1046	1046	1046
Altezza (min)	mm	784	784	784
Peso minimo batteria (48V/80V) kg		930	1385	1710



CISC0147 (8/99) ok
Copyright © 1999, MCFE. All rights reserved.
CATERPILLAR and CAT are registered trademarks of Caterpillar Inc.
Printed in The Netherlands
www.catlifttruck.com



EP Series
2.0 - 3.0 t



Carrelli elevatori elettronici con gommatura pneumatica
progettati per offrire produttività, comfort e sicurezza
nella movimentazione dei materiali.

NOTE: Performance specifications may vary depending on standard manufacturing tolerances, vehicle condition, types of tyres, floor or surface conditions, applications, or operating environment. Trucks may be shown with non-standard options. Specific performance requirements and locally available configurations should be discussed with your Caterpillar Lift Truck Dealer. Caterpillar follows a policy of continual product improvement. For this reason, some materials, options and specifications could change without notice.