

FB13–20PNT/PN Series

Specification Manual • Electric Counterbalance
3/4 Wheel Pneumatic Tyres • 1.3 – 2.0 tonnes.

FB13–15PNT
FB16–18CPNT
FB16–20PNT

FB16–18CPN
FB16–20PN

1.	FB13–20(C)PNT Standard Configuration.....	2
2.	FB16–20(C)PN Standard Configuration	5
3.	Energy consumption, Noise and Vibrations	7
4.	Mast availability chart	7
5.	Option availability chart.....	8
6.	Forks and Carriages	10
7.	Wheels.....	10
8.	Overhead guard options	11
9.	Ground pressure	11
10.	Battery Dimensions	12
11.	Battery & Charger combination.....	12
12.	Mast capacity charts.....	14





5–2

1. FB13–20(C)PNT STANDARD CONFIGURATION

3 – Wheel chassis, 48 Volts, front–wheel drive, PM–1000 AC – control system, Two 4,5kW AC traction motors, 11,5kW AC hydraulic motor, FeatherTouch Steering and Electronic Power Steering, Audible Backup Alarm, Pneumatic shaped solid tires (Super Elastic), Full–suspension Vinyl Seat, Wet Disk Brakes, Integrated Presence System (IPS2) with Automatic Parkbrake, Park Brake Buzzer and Lift Tilt Interlock, Tilttable steering column, Manual hydraulic control (Levers), 3–way hydraulic valve, Work lights (2 front & 1 rear) 48V / 45W.

Characteristics			Mitsubishi	Mitsubishi	Mitsubishi	Mitsubishi	Mitsubishi
1.1	Manufacturer (abbreviation)		FB13PNT	FB15PNT	FB16CPNT	FB16PNT	FB18CPNT
1.2	Manufacturer's model designation		Electric	Electric	Electric	Electric	Electric
1.3	Power source: (battery, diesel, LP gas, petrol)		Seated	Seated	Seated	Seated	Seated
1.4	Operator type: pedestrian, (operator)-standing, -seated						
1.5	Load capacity	Q kg	1,300	1,500	1,600	1600	1800
1.6	Load centre distance	c (mm)	500	500	500	500	500
1.8	Load distance, axle to fork face	x (mm)	373	373	373	373	373
1.9	Wheelbase	y (mm)	1285	1285	1395	1505	1395
Weight							
2.1	Truck weight, without load / including battery (simplex mast, lowest lift height)	kg	2779	2972	3034	3134	3134
2.2	Axle loading with maximum load, front/rear (simplex mast, lowest lift height)	kg	3564/515	3897/575	4053/581	4068/666	4378/556
2.3	Axle loading without load, front/rear (simplex mast, lowest lift height)	kg	1381/1398	1378/1594	1451/1583	1540/1594	1452/1683
Wheels, Drive Train							
3.1	Tyres: V=solid, L=pneumatic, SE=solid pneumatic - front/rear		SE / SE	SE / SE	SE / SE	SE / SE	SE / SE
3.2	Tyre dimensions, front		18x7-8	18x7-8	18x7-8	18x7-8	18x7-8
3.3	Tyre dimensions, rear		140/55-9	140/55-9	140/55-9	140/55-9	140/55-9
3.5	Number of wheels, front/rear (x=driven)		2x/2	2x/2	2x/2	2x/2	2x/2
3.6	Track width (centre of tyres), front	b10 (mm)	920	920	920	920	920
3.7	Track width (centre of tyres), rear	b11 (mm)	174	174	174	174	174
Dimensions							
4.1	Mast tilt, forwards/backwards	α/β	5/7.5	5/7.5	5/7.5	5/7.5	5/7.5
4.2	Height with mast lowered (see tables)	h1 (mm)	2125	2125	2125	2125	2125
4.3	Free lift (see tables)	h2 (mm)	80	80	80	80	80
4.4	Lift height (see tables)	h3 (mm)	3290	3290	3290	3290	3290
4.5	Overall height with mast raised	h4 (mm)	4342	4342	4342	4342	4342
4.7	Height to top of overhead guard	h6 (mm)	2050	2050	2050	2050	2050
4.8	Seat height	h7 (mm)	974	974	974	974	974
4.12	Tow coupling height	h10 (mm)	575	575	575	575	575
4.19	Overall length	l1 (mm)	2998	2998	3108	3218	3108
4.20	Length to fork face (includes fork thickness)	l2 (mm)	1848	1848	1958	2068	1958
4.21	Overall width	b1/b2 (mm)	1090	1090	1090	1090	1090
4.22	Fork dimensions (thickness, width, length)	s / e / l (mm)	35x100x1150	35x100x1150	35x100x1150	35x100x1150	35x100x1150
4.23	Fork carriage to DIN 15 173 A/B/no		2A	2A	2A	2A	2A
4.24	Fork carriage width	b3 (mm)	920	920	920	920	920
4.31	Ground clearance under mast, with load	m1 (mm)	95	95	95	95	95
4.32	Ground clearance at centre of wheelbase, with load (forks lowered)	m2 (mm)	85	85	85	85	85
4.33	Working aisle width with 1000 x1200 mm pallets, crosswise	Ast (mm)	3173	3173	3283	3393	3283
4.34	Working aisle width with 800 x1200 mm pallets, crosswise	Ast (mm)	2993	2993	3103	3213	3103
4.35	Turning circle radius	Wa (mm)	1475	1475	1585	1695	1585
4.36	Minimum distance between centres of rotation	b13 (mm)	0	0	0	0	0
Performance							
5.1	Travel speed, with/without load	km/h	16 / 16	16 / 16	16 / 16	16 / 16	16 / 16
5.2	Lifting speed, with/without load	m/s	0.5 / 0.6	0.5 / 0.6	0.5 / 0.6	0.5 / 0.6	0.44 / 0.6
5.3	Lowering speed, with/without load	m/s	0.52 / 0.5	0.52 / 0.5	0.52 / 0.5	0.52 / 0.5	0.52 / 0.5
5.5	Rated drawbar pull, with/without load	N	2810 / 3130	2720 / 3090	2680 / 3070	2650 / 3050	2610 / 3050
5.6	Maximum drawbar pull, with/without load (5 min short duty)	N	11390 / 11710	11290 / 11660	12020 / 12410	12160 / 12550	11950 / 12390
5.7	Gradeability, with/without load	%	11 / 18	10 / 16	11 / 16	9 / 15	9 / 15
5.8	Electric Maximum gradeability, with/without load	%	28 / 35	26 / 35	27 / 35	26 / 35	25 / 35
5.9	Acceleration time (10 metres) with/without load	s	4.1 / 3.6	4.2 / 3.7	4.3 / 3.7	4.3 / 3.8	4.3 / 3.8
5.10	Service brakes (mechanical/hydraulic/electric/pneumatic)		Mech./hydr.	Mech./hydr.	Mech./hydr.	Mech./hydr.	Mech./hydr.
Electric motors							
6.1	Drive motor capacity (60 min. short duty)	kW	4.5x2	4.5x2	4.5x2	4.5x2	4.5x2
6.2	Lift motor output at 15% duty factor	kW	11.5	11.5	11.5	11.5	11.5
6.3	Battery to DIN 43 531/35/36 A/B/C/no		DIN 43531 A	DIN 43531 A	DIN 43531 A	DIN 43531 A	DIN 43531 A
6.4	Battery voltage/capacity at 5-hour discharge	V/Ah	48V / 500Ah	48V / 500Ah	48V 625Ah	48V 750Ah	48V / 625Ah
6.5	Battery weight	kg	715	715	855	1025	855
6.6	Energy consumption according to VDI 60 cycle	kWh/h	-	-	-	-	-
Miscellaneous							
8.1	Type of drive control		AC transistor	AC transistor	AC transistor	AC transistor	Impulse /AC
8.2	Maximum operating pressure for attachments	bar	181	181	181	181	181
8.3	Oil flow for attachments	l/min	-	-	-	-	-
8.4	Noise level, value at operator's ear (EN 12053)	dB(A)	66	66	66	66	66
8.5	Towing coupling design / DIN type, ref.		15170 / H	15170 / H	15170/H	15170/H	15170 / H

Characteristics					
1.1	Manufacturer (abbreviation)		Mitsubishi	Mitsubishi	Mitsubishi
1.2	Manufacturer's model designation		FB18CPNT	FB18PNT	FB20PNT
1.3	Power source: (battery, diesel, LP gas, petrol)		Electric	Electric	Electric
1.4	Operator type: pedestrian, (operator)-standing, -seated		Seated	Seated	Seated
1.5	Load capacity	Q kg	1800	1800	2000
1.6	Load centre distance	c (mm)	500	500	500
1.8	Load distance, axle to fork face	x (mm)	373	373	384
1.9	Wheelbase	y (mm)	1395	1505	1505
Weight					
2.1	Truck weight, without load / including battery (simplex mast, lowest lift height)	kg	3134	3227	3459
2.2	Axle loading with maximum load, front/rear (simplex mast, lowest lift height)	kg	4378/556	4383/644	4759/700
2.3	Axle loading without load, front/rear (simplex mast, lowest lift height)	kg	1452/1683	1539/1688	1584/1875
Wheels, Drive Train					
3.1	Tyres: V=solid, L=pneumatic, SE=solid pneumatic - front/rear		SE / SE	SE / SE	SE / SE
3.2	Tyre dimensions, front		18x7-8	18x7-8	200/50-10
3.3	Tyre dimensions, rear		140/55-9	140/55-9	140/55-9
3.5	Number of wheels, front/rear (x=driven)		2x/2	2x/2	2x/2
3.6	Track width (centre of tyres), front	b10 (mm)	920	920	938
3.7	Track width (centre of tyres), rear	b11 (mm)	174	174	174
Dimensions					
4.1	Mast tilt, forwards/backwards	α/β	5/7.5	5/7.5	5/7.5
4.2	Height with mast lowered (see tables)	h1 (mm)	2125	2125	2125
4.3	Free lift (see tables)	h2 (mm)	80	80	80
4.4	Lift height (see tables)	h3 (mm)	3290	3290	3290
4.5	Overall height with mast raised	h4 (mm)	4342	4342	4342
4.7	Height to top of overhead guard	h6 (mm)	2050	2050	2050
4.8	Seat height	h7 (mm)	974	974	974
4.12	Tow coupling height	h10 (mm)	575	575	575
4.19	Overall length	l1 (mm)	3108	3218	3229
4.20	Length to fork face (includes fork thickness)	l2 (mm)	1958	2068	2079
4.21	Overall width	b1/b2 (mm)	1090	1090	1140
4.22	Fork dimensions (thickness, width, length)	s / e / l (mm)	35x100x1150	35x100x1150	35x100x1150
4.23	Fork carriage to DIN 15 173 A/B/no		2A	2A	2A
4.24	Fork carriage width	b3 (mm)	920	920	920
4.31	Ground clearance under mast, with load	m1 (mm)	95	95	95
4.32	Ground clearance at centre of wheelbase, with load (forks lowered)	m2 (mm)	85	85	85
4.33	Working aisle width with 1000 x1200 mm pallets, crosswise	Ast (mm)	3283	3393	3403
4.34	Working aisle width with 800 x1200 mm pallets, crosswise	Ast (mm)	3103	3213	3222
4.35	Turning circle radius	Wa (mm)	1585	1695	1695
4.36	Minimum distance between centres of rotation	b13 (mm)	0	0	0
Performance					
5.1	Travel speed, with/without load	km/h	16 / 16	16 / 16	16 / 16
5.2	Lifting speed, with/without load	m/s	0.44 / 0.6	0.44 / 0.6	0.4 / 0.6
5.3	Lowering speed, with/without load	m/s	0.52 / 0.5	0.52 / 0.5	0.52 / 0.5
5.5	Rated drawbar pull, with/without load	N	2610 / 3050	2580 / 3020	2480 / 2970
5.6	Maximum drawbar pull, with/without load (5 min short duty)	N	11950 / 12390	12090 / 12530	11980 / 12470
5.7	Gradeability, with/without load	%	9 / 15	9 / 15	8 / 14
5.8	Electric Maximum gradeability, with/without load	%	25 / 35	25 / 35	23 / 35
5.9	Acceleration time (10 metres) with/without load	s	4.3 / 3.8	4.4 / 3.8	4.5 / 3.9
5.10	Service brakes (mechanical/hydraulic/electric/pneumatic)		Mech./hydr.	Mech./hydr.	Mech./hydr.
Electric motors					
6.1	Drive motor capacity (60 min, short duty)	kW	4.5x2	4.5x2	4.5x2
6.2	Lift motor output at 15% duty factor	kW	11.5	11.5	11.5
6.3	Battery to DIN 43 531/35/36 A/B/C/no		DIN 43531 A	DIN 43531 A	DIN 43531 A
6.4	Battery voltage/capacity at 5-hour discharge	V/Ah	48V / 625Ah	48V / 750Ah	48V / 750Ah
6.5	Battery weight	kg	855	855	1025
6.6	Energy consumption according to VDI 60 cycle	kWh/h			
Miscellaneous					
8.1	Type of drive control		Impulse /AC	AC transistor	AC transistor
8.2	Maximum operating pressure for attachments	bar	181	181	181
8.3	Oil flow for attachments	l/min	-	-	-
8.4	Noise level, value at operator's ear (EN 12053)	dB(A)	66	66	66
8.5	Towing coupling design / DIN type, ref.		15170 / H	15170 / H	15170 / H

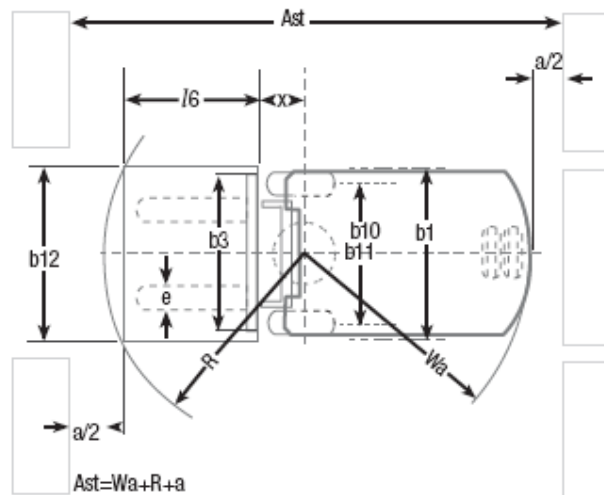
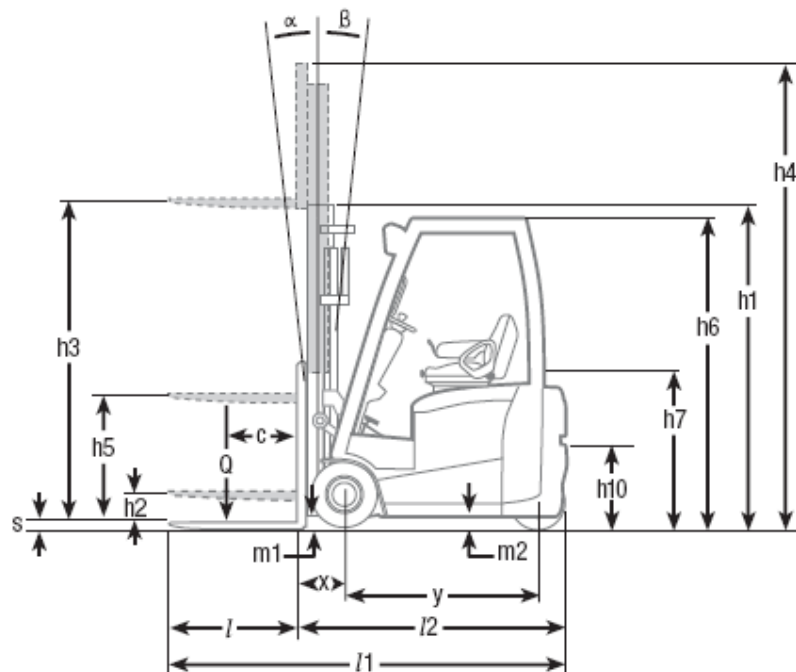


- Ast = Working aisle width with load
 a = Safety clearance (200 mm)
 l_6 = Pallet length (800 or 1000 mm)
 b_{12} = Pallet width (1200 mm)

2. FB16–20(C)PN STANDARD CONFIGURATION

4 – Wheel chassis, 48 Volts, front–wheel drive, PM–1000 AC – control system, Two 4,5kW AC traction motors, 11,5kW AC hydraulic motor, FeatherTouch Steering and Electronic/Hydrostatic Power Steering, Audible Backup Alarm, Pneumatic shaped solid tires (Super Elastic), Full–suspension Vinyl Seat, Wet Disk Brakes, Integrated Presence System (IPS2) with Automatic Parkbrake, Tilttable steering column, Manual hydraulic control (Levers), 3–way hydraulic valve, Work lights (2 front & 1 rear) 48V / 45W

Characteristics			Mitsubishi	Mitsubishi	Mitsubishi	Mitsubishi	Mitsubishi
1.1	Manufacturer (abbreviation)		FB16CPN	FB16PN	FB18CPN	FB18PN	FB20PN
1.2	Manufacturer's model designation		Electric	Electric	Electric	Electric	Electric
1.3	Power source: (battery, diesel, LP gas, petrol)		Seated	Seated	Seated	Seated	Seated
1.4	Operator type: pedestrian, (operator)-standing, -seated		1600	1600	1800	1800	2000
1.5	Load capacity	Q kg	500	500	500	500	500
1.6	Load centre distance	c (mm)	373	373	373	373	384
1.8	Load distance, axle to fork face	x (mm)	1446	1556	1446	1556	1556
1.9	Wheelbase	y (mm)					
Weight							
2.1	Truck weight, without load / including battery (simplex mast, lowest lift height)	kg	3044	3095	3099	3161	3325
2.2	Axle loading with maximum load, front/rear (simplex mast, lowest lift height)	kg	3999/645	4039/656	4315/584	4343/618	4693/631
2.3	Axle loading without load, front/rear (simplex mast, lowest lift height)	kg	1433/1611	1541/1554	1428/1671	1533/1628	1557/1768
Wheels, Drive Train							
3.1	Tyres: V=solid, L=pneumatic, SE=solid pneumatic - front/rear		SE / SE	SE / SE	SE / SE	SE / SE	SE / SE
3.2	Tyre dimensions, front		18x7-8	18x7-8	18x7-8	18x7-8	200/50-10
3.3	Tyre dimensions, rear		16x6-8	16x6-8	16x6-8	16x6-8	16x6-8
3.5	Number of wheels, front/rear (x=driven)		2x/2	2x/2	2x/2	2x/2	2x/2
3.6	Track width (centre of tyres), front	b10 (mm)	920	920	920	920	938
3.7	Track width (centre of tyres), rear	b11 (mm)	898	898	898	898	898
Dimensions							
4.1	Mast tilt, forwards/backwards	α/β	5/7.5	5/7.5	5/7.5	5/7.5	5/7.5
4.2	Height with mast lowered (see tables)	h1 (mm)	2125	2125	2125	2125	2125
4.3	Free lift (see tables)	h2 (mm)	80	80	80	80	80
4.4	Lift height (see tables)	h3 (mm)	3290	3290	3290	3290	3290
4.5	Overall height with mast raised	h4 (mm)	4342	4342	4342	4342	4342
4.7	Height to top of overhead guard	h6 (mm)	2050	2050	2050	2050	2050
4.8	Seat height	h7 (mm)	974	974	974	974	974
4.12	Tow coupling height	h10 (mm)	575	575	575	575	575
4.19	Overall length	l1 (mm)	3302	3412	3302	3412	3423
4.20	Length to fork face (includes fork thickness)	l2 (mm)	2152	2262	2152	2262	2273
4.21	Overall width	b1/b2 (mm)	1090	1090	1090	1090	1140
4.22	Fork dimensions (thickness, width, length)	s / e / l (mm)	35x100x1150	35x100x1150	35x100x1150	35x100x1150	35x100x1150
4.23	Fork carriage to DIN 15 173 A/B/no		2A	2A	2A	2A	2A
4.24	Fork carriage width	b3 (mm)	920	920	920	920	920
4.31	Ground clearance under mast, with load	m1 (mm)	95	95	95	95	95
4.32	Ground clearance at centre of wheelbase, with load (forks lowered)	m2 (mm)	85	85	85	85	85
4.33	Working aisle width with 1000 x1200 mm pallets, crosswise	Ast (mm)	3473	3588	3473	3588	3599
4.34	Working aisle width with 800 x1200 mm pallets, crosswise	Ast (mm)	3273	3388	3273	3388	3399
4.35	Turning circle radius	Wa (mm)	1900	2015	1900	2015	2015
4.36	Minimum distance between centres of rotation	b13 (mm)	481	544	481	544	544
Performance							
5.1	Travel speed, with/without load	km/h	17 / 17	17 / 17	17 / 17	17 / 17	17 / 17
5.2	Lifting speed, with/without load	m/s	0.5 / 0.6	0.5 / 0.6	0.44 / 0.6	0.44 / 0.6	0.4 / 0.6
5.3	Lowering speed, with/without load	m/s	0.52 / 0.5	0.52 / 0.5	0.52 / 0.5	0.52 / 0.5	0.52 / 0.5
5.5	Rated drawbar pull, with/without load	N	2680 / 3070	2660 / 3060	2610 / 3060	2600 / 3040	2510 / 3000
5.6	Maximum drawbar pull, with/without load (5 min short duty)	N	12020 / 12410	12170 / 12560	11950 / 12400	12110/12550	1202 / 12510
5.7	Gradeability, with/without load	%	10 / 16	9 / 16	9 / 16	9/15	8 / 14
5.8	Electric Maximum gradeability, with/without load	%	27 / 35	27 / 35	25 / 35	25/35	23 / 35
5.9	Acceleration time (10 metres) with/without load	s	4.3 / 3.7	4.3 / 3.7	4.3 / 3.7	4.4 / 3.8	4.4 / 3.8
5.10	Service brakes (mechanical/hydraulic/electric/pneumatic)		Mech./hydr.	Mech./hydr.	Mech./hydr.	Mech./hydr.	Mech./hydr.
Electric motors							
6.1	Drive motor capacity (60 min. short duty)	kW	4.5x2	4.5x2	4.5x2	4.5x2	4.5x2
6.2	Lift motor output at 15% duty factor	kW	11.5	11.5	11.5	11.5	11.5
6.3	Battery to DIN 43 531/35/36 A/B/C/no		DIN 43531 A	DIN 43531 A	DIN 43531 A	DIN 43531 A	DIN 43531 A
6.4	Battery voltage/capacity at 5-hour discharge	V/Ah	48V / 625Ah	48V / 750Ah	48V / 625Ah	48V / 750Ah	48V / 750Ah
6.5	Battery weight	kg	855	1025	855	1025	1025
6.6	Energy consumption according to VDI 60 cycle	kWh/h					
Miscellaneous							
8.1	Type of drive control		AC transistor	AC transistor	AC transistor	AC transistor	AC transistor
8.2	Maximum operating pressure for attachments	bar	181	181	181	181	181
8.3	Oil flow for attachments	l/min	-	-	-	-	-
8.4	Noise level, value at operator's ear (EN 12053)	dB(A)	67	67	67	67	67
8.5	Towing coupling design / DIN type, ref.		15170 / H	15170 / H	15170 / H	15170 / H	15170 / H

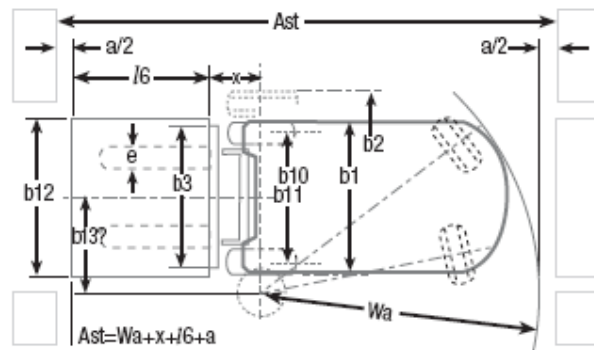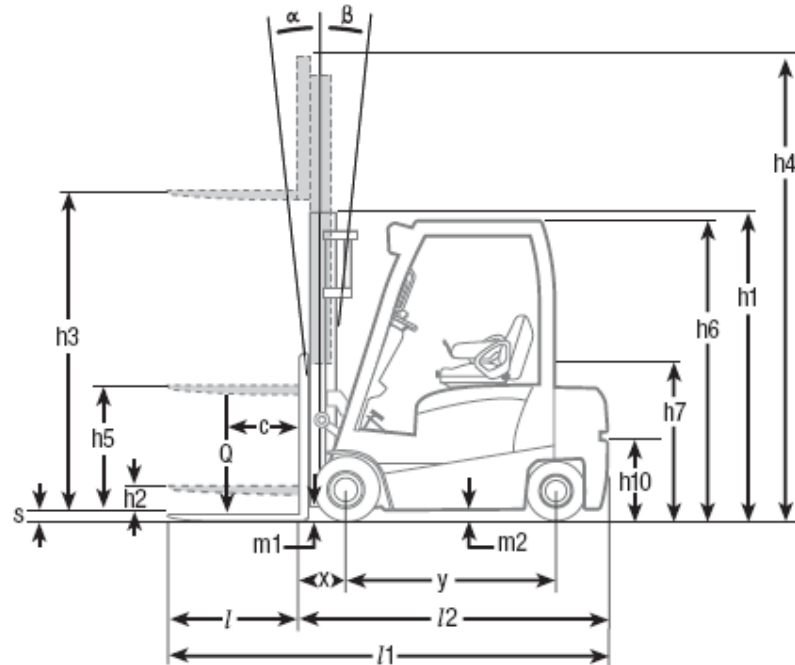

5-2

Ast = Working aisle width with load
 a = Safety clearance (200 mm)
 l_6 = Pallet length (800 or 1000 mm)
 b_{12} = Pallet width (1200 mm)

3. ENERGY CONSUMPTION, NOISE AND VIBRATIONS

ENERGY CONSUMPTION (according VDI2198)

	Consumption
13-15PNT	
16-18CPNT	4,4 KWh
16-20PNT	

	Consumption
16-18CPN	
16-20PN	

	Noise level dB(A)
13-15PNT	
16-18CPNT	66
16-20PNT	
16-18CPN	67
16-20PN	

	Noise level dB(A)
13-15PNT	
16-18CPNT	
16-20PNT	
16-18CPN	
16-20PN	

	Vibration level at operators seat [m/s ²]
13-15PNT	
16-18CPNT	0,93
16-20PNT	
16-18CPN	0,66
16-20PN	

4. MAST AVAILABILITY CHART

- Available option
- Standard equipped
- E Available, option may extend lead time (contact CSM department)

		13-15PNT	16-18CPNT 16-18CPN	16-20PNT 16-20PN
Masts				
Special Masts (3rd party)	On request	E	E	E
Strengthened Masts	On request	E	E	E
Mast vertical indicator	CSM6862	E	E	E
Simplex	2SP200	E	E	E
	2SP260	E	E	E
	2SP280	E	E	E
	2SP300	●	●	●
	2SP330	●	●	●
	2SP350	E	E	E
	2SP370	●	●	●
	2SP410	●	●	●
	2SP450	●	●	●
	2SP500	●	●	●
	2SP550	●	●	●
	2SP600	●	●	●
Duplex	2FP280	E	E	E
	2FP300	●	●	●
	2FP330	●	●	●
	2FP350	E	E	E
	2FP370	●	●	●
	2FP400	●	●	●
Triplex	3FP370	●	●	●
	3FP400	●	●	●
	3FP430	●	●	●
	3FP450 1)	E	E	E
	3FP480	●	●	●
	3FP510	●	●	●
	3FP550	●	●	●
	3FP600	●	●	●
	3FP650	●	●	●
	3FP700	●	●	●

Note: 1) Collapsed height h1 = 2025mm

5. OPTION AVAILABILITY CHART

Refer to the Option Manual for option specifications

				13-15PNT	16-18CPNT /16-18CPN	16-20PNT /16-20PN
CARRIAGES						
Hook-on Sideshift Carriage	SS092			•	•	•
Integrated Sideshift Carriage	INSS092			•	•	•
Backrest Deletion	BRX			•	•	•
HYDRAULIC VALVES						
3-Way Valve for Manual Control	3V/MC	1)		0	0	0
4-Way Valve for Manual Control	4V/MC	2)		•	•	•
3-Way Valve for Finger Tip Control	3V/FC			•	•	•
4-Way Valve for Finger Tip Control	4V/FC			•	•	•
PIPING FOR HYDRAULICS						
3 - Way Piping	Simplex Masts	3V/PS		•	•	•
	Duplex Masts	3V/PD		•	•	•
	Triplex Masts	3V/PT		•	•	•
	3 Way Attachment on chassis	3VATT		•	•	•
4 - Way Piping	Simplex Masts	4V/PS	3)	•	•	•
	Duplex Masts	4V/PD	3)	•	•	•
	Triplex Masts	4V/PT	3)	•	•	•
	4 Way Attachment on chassis	4VATT	3)	•	•	•
ELECTRICAL SYSTEM						
DIN Connector for 48 V battery	DIN48B			•	•	•
DIN Connector for 48 V charger	DIN48C			•	•	•
Road Light Kit (LED type, 48 V)	RLDC LED	4)		•	•	•
Worklight deletion	LDCX			•	•	•
Work Lights 2 Fornt / 1 Rear (LED type)	LED LIGHTS			•	•	•
Work Lights 2 Fornt / 1 Rear (Halogen type)	HALOGEN			0	0	0
FNR Switch mounted on adjustable Armrest	ARMDC	5)		•	•	•
DC/DC Converter (12V, 300 Watt)	DC300W			•	•	•
Foot Directional Control	FDC	6)		•	•	•
Weight indicator in display	LWI			•	•	•
Amber Strobe (LED type)	LEDSTRB			•	•	•
TIRES						
Solid tires (SE Super Elastic)	US/US			0	0	0
Non-marking solid tires (SE)	NM/US			•	•	•

OPTION AVAILABILITY CHART (CONT')

Refer to the Option Manual for option specifications

		13-15PNT	16-18CPNT /16-18CPN	16-20PNT /16-20PN
FRAME AND BODY				
High Visibility Overhead Guard	HG/HIVIZ	•	•	•
Full Suspension Cloth Seat with Seat Belt and Switch	SEAT/C	•	•	•
Sideway Battery Exchange (includes roller bed inside truck)	SWE 7)	•	•	•
Reverse drive handle with horn button	BHORN	•	•	•
Battery Roll Out Table (outside truck)	PCSM191	E	E	E
Rear View Mirror	RVM	•	•	•
Wide View Mirror	WVM	•	•	•
White noise buzzer	PCSM017	•	•	•
Smart backup alarm	PCSM246	•	•	•
Double action FC, for clamp usage	PCSM244	E	E	E
Double action MC, for clamp usage	PCSM245	E	E	E
Mast vertical indicator	CSM6862	E	E	E
Truck lifting eyes for mast	PCSM239	E	E	E
Pilot Protectors (IWS Doors)	PCSM018	E	E	E
Biodegradable Hydraulic Oil (+ Filter)	PCSM048	E	E	E
Food grade oil	PCSM039	E	E	E
Pilot Protectors (IWS Doors)	PCSM018	E	E	E
Special color for chassis only (state RAL code on order)	SP/CLR FR 8)	•	•	•
Chassis and headguard in special color (RAL code on order)	SP/CLR HG 8)	•	•	•
CABINS				
Laminated GlassFront Screen with Washer/Wiper (incl. HG/HIVIZ)	FR+TP 9)	•	•	•
Add on to FR+TP, tempered Rear Screen equipped with Washer/Wiper	REAR	•	•	•
Add on to FR+TP and REAR, removable PVC Doors	PVC/D	•	•	•
Add on to FR+TP and REAR, Steel Doors equipped (Sliding Windows)	STL/D	•	•	•
1,5kW Heating System with adjustable air inlet	HEAT 10)	•	•	•
Tilt Cylinder hole covers, covering gap front side	T/COV 11)	•	•	•
Battery slot cover	BATT/SLOT	•	•	•
Reading light on flexible arm (LED type)	R/L	•	•	•
12V connector power supply	12V CONN	•	•	•
Sun Visor	SUN VISOR	•	•	•
SPECIAL TREATMENT				
Galvanized chassis for 1 unit	PCSM080	E	E	E
Galvanized mast 2SP+Carriage+LBR	PCSM090	E	E	E
Galvanized mast 2FP+Carriage+LBR	PCSM091	E	E	E
Galvanized mast 3FP+Carriage+LBR	PCSM092	E	E	E
Explosion Proof Modification (Pyroban or Miretti)	On Request	E	E	E
OTHERS				
RAVAS Load Indicator (Hydraulic)	PCSM051	E	E	E
RAVAS weighing system 2.5 ton	PCSM260 12)	E	E	E
RAVAS weighing system separate compact printer	PCSM269 13)	E	E	E
Orlaco Fork Mounted Camera	PCSM180 14)	E	E	E
Orlaco rear vision camera	PCSM181 14)	E	E	E
Orlaco combined fork mounted & rear vision camera	PCSM182 14)	E	E	E

NOTE:

1) Requires Piping for 3-Way Hydraulic Supply Group.

2) Requires Piping for 4-Way Hydraulic Supply Group.

3) Requires 4-Way Valve.

4) Rear: 2 direction indicators, brake, tail and backup lights

Front: Contour lights and direction indicators.

5) For Models equipped with Fingertip Hydraulic Control.

6) Not in combination with option HEAT.

7) Battery exchange system not included

8) Please inform RAL colour number

9) standard mast tilt is limitted to 5 degrees backward tilt. Total height of truck is +50mm due to the hingable cover for battery exchange.

3FP370 and 3FP400 restricted to 3.5 degrees backward tilt.

10) Requires STL/D. The T/COV are not included.

11) Consider ordering in combination with the HEATER


12) Tolerance is 0.1% of total weight.

13) Requires PCSM260

14) Requires DC/DC conveter option [DC300W]

6. FORKS AND CARRIAGES

	Width	Thickness	Length									
			L900	L1000	L1100	L1150	L1200	L1400	L1500	L1700	L1800	L2000
13-15ONT	100	35	•	•	•	•	•	•				
16-18CPN(T)												
16-20PN(T)	100	40							•	•	•	•



Refer to the Option Manual for option specifi

Refer to the Option Manual for option specifi			13-15PNT	16-18CPNT /16-18CPN	16-20PNT /16-20PN
		height (mm)			
width (mm)			965	965	975
STANDARD CARRIAGES					
920			O	O	O
HOOK ON SIDE SHIFTER					
920	SS092	1)	●	●	●
INTEGRAL SIDE SHIFTER					
920	INSS092	1)	●	●	●
HOOK ON FORK POSITIONER					
Cascade W Forks	PCSM184	1)	E	E	E
Cascade W Adapters	PCSM185	1)	E	E	E

NOTE: 1) Requires 3-Way hydraulic supply group; specify model


7. WHEELS

Solid Pneumatic (SE)			Tyre size	Rim type	SE	Non Marking (White/yellow)
13-18(C)PNT	Front	Single	18x7-8	Side-ring	O	•
	Rear		140/55-9	Side-ring	O	•
20PNT	Front	Single	200/50-10	Side-ring	O	•
	Rear		140/55-9	Side-ring	O	•
16-18(C)PN	Front	Single	18x7-8	Side-ring	O	•
	Rear		16x6-8	Side-ring	O	•
20PN	Front	Single	200/50-10	Side-ring	O	•
	Rear		16x6-8	Side-ring	O	•

8. OVERHEAD GUARD OPTIONS

		13-15PNT	16-18CPNT /16-18CPN	16-20PNT /16-20PN
Overhead Guard Specials				
Drive In Rack Overhead Guard (narrow roof)	PCSM166	E	E	E

NOTE: 1) Not in combination with FC hydraulic controls

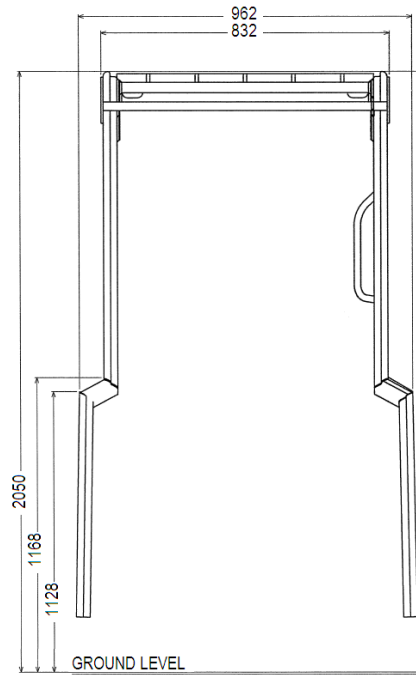

PCSM166 Narrow Roof model

9. GROUND PRESSURE

		With load [kg/cm ²]	Without load [kg/cm ²]
13PNT	Front	12,6	
	Rear		10,9
15PNT	Front	13,5	
	Rear		11,3
16CPNT	Front	13,8	
	Rear		11,3
18CPNT	Front	14,7	
	Rear		11,5
16PNT	Front	13,8	
	Rear		11,3
18PNT	Front	14,7	
	Rear		11,5
20PNT	Front	13,1	
	Rear		12,0

		With load [kg/cm ²]	Without load [kg/cm ²]
16CPN	Front	13,7	
	Rear		11,3
18CPN	Front	14,5	
	Rear		11,5
16PN	Front	13,8	
	Rear		11,0
18PN	Front	14,5	
	Rear		11,3
20PN	Front	13,0	
	Rear		11,8

10. BATTERY DIMENSIONS

The dimensions below are based on DIN-A battery sizes												
Model	Compartment dimensions			Container dimensions				Battery weight		Voltage (Volt)	Capacity (Ah/5h)	Connector acc. to EEC 86/663 add. C
	l	w	h	l	w	h1	h2	Min.	Max.			
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)	(kg)			
13-15PNT				522	830	612	627	679	751	48	500	DIN 320A 48V
16-18CPNT				630	830	612	627	812	898	48	625	DIN 320A 48V
16-20PNT				738	830	612	627	974	1076	48	750	DIN 320A 48V

16-18CPN				630	830	612	627	812	898	48	625	DIN 320A 48V
16-20PN				738	830	612	627	974	1076	48	750	DIN 320A 48V

The dimensions below are based on British Standard (BS) battery sizes												
Model	l w h			l w h1 h2				Min. (kg)	Max. (kg)	acc. to EEC		
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)			(Volt)	(Ah/5h)	86/663 add. C
13-15PNT				521	1006	620	650	865	1076	48	625	SBE 320 BLUE
16-18CPNT				624	1006	612	627	1000	1076	48	750	SBE 320 BLUE

16-18CPN				624	1006	612	627	1000	1076	48	750	SBE 320 BLUE
----------	--	--	--	-----	------	-----	-----	------	------	----	-----	--------------

11. BATTERY & CHARGER COMBINATION

Exide (GNB)												
Model	Battery				Charger				Charger			
	WET	Code	DRY	Code	12 hour	Phase	Amp	Code	8 hour	Phase	Amp	Code
13PNT 15PNT	420	BW48D420E	420	BD48D420E	Standard	3	60	CH48/060E	Standard	3	70	CH48/070E
					High Frequency	3	40	CH48H040E	High Frequency	3	60	CH48H060E
					Standard Tropical	3	60	CT48/060E	Standard Tropical	3	70	CT848/070E
13PNT 15PNT	500	BW48D500E	500	BD48D500E	Standard	3	70	CH48/070E	Standard	3	80	CH48/080E
					High Frequency	3	50	CH48H050E	High Frequency	3	70	CH48H070E
					Standard Tropical	3	70	CT48/070E	Standard Tropical	3	80	CT848/080E
16CPN(T) 18CPN(T)	525	BW48D525E	525	BD48D525E	Standard	3	70	CH48/070E	Standard	3	80	CH48/080E
					High Frequency	3	50	CH48H050E	High Frequency	3	70	CH48H070E
					Standard Tropical	3	70	CT48/070E	Standard Tropical	3	80	CT848/080E
16CPN(T) 18CPN(T)	625	BW48D625E	625	BD48D625E	Standard	3	80	CH48/080E	Standard	3	100	CH48/100E
					High Frequency	3	60	CH48H060E	High Frequency	3	80	CH48H080E
					Standard Tropical	3	80	CT48/080E	Standard Tropical	3	100	CT848/100E
16PN(T) 18PN(T) 20PN(T)	630	BW48D630E	630	BD48D630E	Standard	3	80	CH48/080E	Standard	3	100	CH48/100E
					High Frequency	3	60	CH48H060E	High Frequency	3	80	CH48H080E
					Standard Tropical	3	80	CT48/080E	Standard Tropical	3	100	CT848/100E
16PN(T) 18PN(T) 20PN(T)	750	BW48D750E	750	BD48D750E	Standard	3	100	CH48/100E	Standard	3	120	CH48/120E
					High Frequency	3	70	CH48H070E	High Frequency	3	100	CH48H100E
					Standard Tropical	3	100	CT48/100E	Standard Tropical	3	120	CT848/120E

BATTERY & CHARGER COMBINATION (CONT')

Model	Hoppecke											
	Battery				Charger				Charger			
	WET	Code	DRY	Code	12 hour	Phase	Amp	Code	8 hour	Phase	Amp	Code
13PNT 15PNT	420	BW48D420H	420	BD48D420H	Standard	3	60	CT48/060H	Standard	3	80	CT45/080H
					High Frequency	3	45	CT45H045H	High Frequency	3	55	CT48H055H
13PNT 15PNT	500	BW48D500H	500	BD48D500H	Standard	3	70	CT48/070H	Standard	3	90	CT48/090H
					High Frequency	3	45	CT48H045H	High Frequency	3	65	CT48H065H
16CPN(T) 18CPN(T)	525	BW48D525H	525	BD48D525H	Standard	3	70	CT48/070H	Standard	3	100	CT48/100H
					High Frequency	3	55	CT48H055H	High Frequency	3	65	CT48H065H
16CPN(T) 18CPN(T)	625	BW48D625H	625	BD48D625H	Standard	3	90	CT48/090H	Standard	3	115	CT48/115H
					High Frequency	3	65	CT48H065H	High Frequency	3	80	CT48H080H
16PN(T) 18PN(T) 20PN(T)	630	BW48D630H	630	BD48D630H	Standard	3	90	CT48/090H	Standard	3	115	CT48/115H
					High Frequency	3	65	CT48H065H	High Frequency	3	80	CT48H080H
16PN(T) 18PN(T) 20PN(T)	750	BW48D750H	750	BD48D750H	Standard	3	100	CT48/100H	Standard	3	140	CT48/140H
					High Frequency	3	65	CT48H065H	High Frequency	3	100	CT48H100H

All Hoppecke chargers are Tropical protected

Model	Hawker-Energys											
	Battery				Charger				Charger			
	WET	Code	DRY	Code	12 hour	Phase	Amp	Code	8 hour	Phase	Amp	Code
13PNT 15PNT	420	BW48D420A	NA		Standard	3	60	CH48/060A	Standard	3	80	CH848/080A
					High Freq. Tropical	3	50	CT48H050A	High Freq. Tropical	3	75	CT48H075A
13PNT 15PNT	500	BW48D500A	NA		Standard	3	70	CH48/070A	Standard	3	100	CH848/100A
					High Freq. Tropical	3	60	CT48H060A	High Freq. Tropical	3	75	CT48H075A
16CPN(T) 18CPN(T)	525	BW48D525A	NA		Standard	3	80	CH48/080A	Standard	3	100	CH848/100A
					High Freq. Tropical	3	60	CT48H060A	High Freq. Tropical	3	100	CT48H100A
16CPN(T) 18CPN(T)	625	BW48D625A	NA		Standard	3	90	CH48/090A	Standard	3	120	CH848/120A
					High Freq. Tropical	3	75	CT48H075A	High Freq. Tropical	3	115	CT48H115A
16PN(T) 18PN(T) 20PN(T)	630	BW48D630A	NA		Standard	3	90	CH48/090A	Standard	3	120	CH848/120A
					High Freq. Tropical	3	75	CT48H075A	High Freq. Tropical	3	115	CT48H115A
16PN(T) 18PN(T) 20PN(T)	750	BW48D750A	NA		Standard	3	100	CH48/100A	Standard	3	140	CH848/140A
					High Freq. Tropical	3	100	CT48H100A	High Freq. Tropical	3	115	CT48H115A

12. MAST CAPACITY CHARTS

13PNT					Standard Forks		Hook-on SS		Integral SS	
h3	h1	h4 ¹⁾	h2/h5 ²⁾	Tilt	Single drive		Single drive		Single drive	
				angle	Solid		Solid		Solid	
					500	600	500	600	500	600
mm	mm	mm	mm	Deg	kg	kg	kg	kg	kg	kg
Simplex										
2000 ³⁾	1480	3045	80	5 / 6	1300	1150	1300	1150	1300	1150
2560 ³⁾	1760	3605	80	5 / 6	1300	1150	1300	1150	1300	1150
2760 ³⁾	1860	3805	80	5 / 7.5	1300	1150	1300	1150	1300	1150
3000 ³⁾	1980	4045	80	5 / 7.5	1300	1150	1300	1150	1300	1150
3290	2125	4335	80	5 / 7.5	1300	1150	1275	1125	1300	1150
3530	2245	4575	80	5 / 7.5	1300	1150	1250	1100	1300	1150
3720	2385	4765	80	5 / 7.5	1300	1150	1225	1075	1275	1125
4090	2570	5135	80	5 / 7.5	1300	1150	1175	1050	1225	1100
4480	2775	5525	80	5 / 5	1275	1125	1150	1025	1175	1050
5000	3035	6045	80	5 / 5	1200	1075	1075	950	1125	1000
5500	3285	6545	80	5 / 3.5	1125	1000	1000	875	1050	925
6000	3535	7045	80	5 / 3.5	1050	925	925	825	975	850
Duplex										
2800 ³⁾	1880	3845	835	5 / 6	1600	1425	1300	1150	1300	1150
3000 ³⁾	1980	4045	935	5 / 6	1600	1425	1300	1150	1300	1150
3290	2125	4340	1080	5 / 6	1600	1425	1275	1125	1300	1150
3515	2245	4560	1200	5 / 6	1600	1425	1250	1100	1300	1150
3700	2385	4745	1340	5 / 6	1600	1425	1225	1075	1275	1125
4030	2570	5075	1525	5 / 6	1600	1425	1175	1050	1225	1075
Triplex										
3710 ³⁾	1780	4755	735	5 / 6	1300	1150	1200	1075	1250	1100
4010 ³⁾	1880	5055	835	5 / 6	1300	1150	1175	1050	1225	1075
4310 ³⁾	1980	5355	935	5 / 6	1275	1125	1150	1025	1175	1050
4750	2125	5795	1080	5 / 6	1225	1075	1100	975	1125	1000
5090	2245	6135	1200	5 - 3.5	1175	1050	1050	925	1100	975
5490	2385	6535	1340	5 - 3.5	1125	1000	975	850	1025	900
5990	2570	7035	1525	5 - 3.5	1075	950	950	850	1000	875
6490	2830	7535	1785	5 - 3.5	950	850	750	650	750	650
7000	3035	8045	1990	5 - 3.5	725	650	475	425	475	425

¹⁾ The h4 dimension without Load Backrest will decrease with 442 mm

²⁾ The h5 dimension without Load Backrest will increase with 442 mm

³⁾ Masts with h1 lower than overhead guard height (2050 mm)

h1 – Height with mast lowered

h2 – Standard free lift

h3 – Standard lift height

h4 – Height with mast raised

h5 – Full free lift

Q – Lifting capacity, rated load

Solid pneumatic tyres (SE): Front 18x7–8, rear 140/55–9

15PNT					Standard Forks		Hook-on SS		Integral SS	
h3	h1	h4 ¹⁾	h2/h5 ²⁾	Tilt angle	Single drive		Single drive		Single drive	
					Solid		Solid		Solid	
					500	600	500	600	500	600
mm	mm	mm	mm	Deg	kg	kg	kg	kg	kg	kg
Simplex										
2000 ³⁾	1480	3045	80	5 / 6	1500	1325	1500	1325	1500	1325
2560 ³⁾	1760	3605	80	5 / 6	1500	1325	1500	1325	1500	1325
2760 ³⁾	1860	3805	80	5 / 7.5	1500	1325	1500	1325	1500	1325
3000 ³⁾	1980	4045	80	5 / 7.5	1500	1325	1500	1325	1500	1325
3290	2125	4335	80	5 / 7.5	1500	1325	1475	1300	1500	1325
3530	2245	4575	80	5 / 7.5	1500	1325	1450	1300	1500	1325
3720	2385	4765	80	5 / 7.5	1500	1325	1425	1275	1475	1300
4090	2570	5135	80	5 / 7.5	1500	1325	1375	1225	1425	1275
4480	2775	5525	80	5 / 5	1475	1300	1325	1175	1375	1225
5000	3035	6045	80	5 / 5	1400	1250	1250	1100	1300	1150
5500	3285	6545	80	5 / 3.5	1325	1175	1200	1075	1250	1100
6000	3535	7045	80	5 / 3.5	1250	1100	1125	1000	1125	1000
Duplex										
2800 ³⁾	1880	3845	835	5 / 6	1500	1325	1500	1325	1500	1325
3000 ³⁾	1980	4045	935	5 / 6	1500	1325	1500	1325	1500	1325
3290	2125	4340	1080	5 / 6	1500	1325	1475	1300	1500	1325
3515	2245	4560	1200	5 / 6	1500	1325	1450	1300	1500	1325
3700	2385	4745	1340	5 / 6	1500	1325	1425	1275	1475	1300
4030	2570	5075	1525	5 / 6	1500	1325	1375	1225	1425	1275
Triplex										
3710 ³⁾	1780	4755	735	5 / 6	1500	1325	1400	1250	1450	1300
4010 ³⁾	1880	5055	835	5 / 6	1500	1325	1375	1225	1425	1275
4310 ³⁾	1980	5355	935	5 / 6	1475	1300	1325	1175	1375	1225
4750	2125	5795	1080	5 / 6	1425	1275	1275	1125	1325	1175
5090	2245	6135	1200	5 - 3.5	1375	1225	1225	1075	1275	1125
5490	2385	6535	1340	5 - 3.5	1325	1175	1175	1050	1225	1075
5990	2570	7035	1525	5 - 3.5	1275	1125	1125	1000	1175	1050
6490	2830	7535	1785	5 - 3.5	1050	925	750	650	750	650
7000	3035	8045	1990	5 - 3.5	725	650	475	425	475	425

¹⁾ The h4 dimension without Load Backrest will decrease with 442 mm

²⁾ The h5 dimension without Load Backrest will increase with 442 mm

³⁾ Masts with h1 lower than overhead guard height (2050 mm)

h1 – Height with mast lowered

h2 – Standard free lift

h3 – Standard lift height

h4 – Height with mast raised

h5 – Full free lift

Q – Lifting capacity, rated load

Solid pneumatic tyres (SE): Front 18x7–8, rear 140/55–9

16CPNT					Standard Forks		Hook-on SS		Integral SS	
h3	h1	h4 ¹⁾	h2/h5 ²⁾	Tilt angle	Single drive		Single drive		Single drive	
					Solid		Solid		Solid	
					500	600	500	600	500	600
mm	mm	mm	mm	Deg	kg	kg	kg	kg	kg	kg
Simplex										
2000 ³⁾	1480	3045	80	5 / 6	1600	1425	1600	1425	1600	1425
2560 ³⁾	1760	3605	80	5 / 6	1600	1425	1600	1425	1600	1425
2760 ³⁾	1860	3805	80	5 / 7.5	1600	1425	1600	1425	1600	1425
3000 ³⁾	1980	4045	80	5 / 7.5	1600	1425	1600	1425	1600	1425
3290	2125	4335	80	5 / 7.5	1600	1425	1600	1425	1600	1425
3530	2245	4575	80	5 / 7.5	1600	1425	1575	1425	1600	1425
3720	2385	4765	80	5 / 7.5	1600	1425	1550	1425	1600	1425
4090	2570	5135	80	5 / 7.5	1600	1425	1500	1375	1550	1425
4480	2775	5525	80	5 / 5	1600	1425	1450	1325	1500	1350
5000	3035	6045	80	5 / 5	1525	1350	1375	1275	1425	1275
5500	3285	6545	80	5 / 3.5	1425	1275	1325	1175	1325	1175
6000	3535	7045	80	5 / 3.5	1300	1150	1150	1025	1150	1025
Duplex										
2800 ³⁾	1880	3845	835	5 / 6	1600	1425	1600	1425	1600	1425
3000 ³⁾	1980	4045	935	5 / 6	1600	1425	1600	1425	1600	1425
3290	2125	4340	1080	5 / 6	1600	1425	1600	1425	1600	1425
3515	2245	4560	1200	5 / 6	1600	1425	1575	1400	1600	1425
3700	2385	4745	1340	5 / 6	1600	1425	1550	1375	1600	1425
4030	2570	5075	1525	5 / 6	1600	1425	1500	1325	1550	1425
Triplex										
3710 ³⁾	1780	4755	735	5 / 6	1600	1425	1525	1350	1600	1425
4010 ³⁾	1880	5055	835	5 / 6	1600	1425	1500	1325	1550	1425
4310 ³⁾	1980	5355	935	5 / 6	1600	1425	1450	1300	1500	1350
4750	2125	5795	1080	5 / 6	1550	1375	1400	1250	1450	1300
5090	2245	6135	1200	5 - 3.5	1500	1325	1350	1200	1400	1250
5490	2385	6535	1340	5 - 3.5	1450	1300	1300	1150	1350	1200
5990	2570	7035	1525	5 - 3.5	1375	1225	1225	1075	1250	1100
6490	2830	7535	1785	5 - 3.5	1050	925	750	650	750	650
7000	3035	8045	1990	5 - 3.5	725	650	475	425	500	425

¹⁾ The h4 dimension without Load Backrest will decrease with 442 mm

²⁾ The h5 dimension without Load Backrest will increase with 442 mm

³⁾ Masts with h1 lower than overhead guard height (2050 mm)

h1 – Height with mast lowered

h2 – Standard free lift

h3 – Standard lift height

h4 – Height with mast raised

h5 – Full free lift

Q – Lifting capacity, rated load

Solid pneumatic tyres (SE): Front 18x7–8, rear 140/55–9

18CPNT					Standard Forks		Hook-on SS		Integral SS	
h3	h1	h4 ¹⁾	h2/h5 ²⁾	Tilt	Single drive		Single drive		Single drive	
				angle	Solid		Solid		Solid	
					500	600	500	600	500	600
mm	mm	mm	mm	Deg	kg	kg	kg	kg	kg	kg
Simplex										
2000 ³⁾	1480	3045	80	5 / 6	1800	1600	1800	1600	1800	1600
2560 ³⁾	1760	3605	80	5 / 6	1800	1600	1800	1600	1800	1600
2760 ³⁾	1860	3805	80	5 / 7.5	1800	1600	1800	1600	1800	1600
3000 ³⁾	1980	4045	80	5 / 7.5	1800	1600	1775	1575	1800	1600
3290	2125	4335	80	5 / 7.5	1800	1600	1725	1525	1800	1600
3530	2245	4575	80	5 / 7.5	1800	1600	1700	1525	1750	1550
3720	2385	4765	80	5 / 7.5	1800	1600	1650	1525	1725	1550
4090	2570	5135	80	5 / 7.5	1750	1600	1600	1475	1675	1525
4480	2775	5525	80	5 / 5	1700	1575	1550	1425	1600	1475
5000	3035	6045	80	5 / 5	1625	1450	1475	1300	1525	1350
5500	3285	6545	80	5 / 3.5	1550	1375	1400	1250	1450	1300
6000	3535	7045	80	5 / 3.5	1425	1275	1175	1025	1150	1025
Duplex										
2800 ³⁾	1880	3845	835	5 / 6	1800	1600	1800	1600	1800	1600
3000 ³⁾	1980	4045	935	5 / 6	1800	1600	1750	1550	1800	1600
3290	2125	4340	1080	5 / 6	1800	1600	1725	1525	1775	1575
3515	2245	4560	1200	5 / 6	1800	1600	1675	1525	1750	1550
3700	2385	4745	1340	5 / 6	1800	1600	1650	1525	1725	1550
4030	2570	5075	1525	5 / 6	1750	1600	1600	1475	1650	1525
Triplex										
3710 ³⁾	1780	4755	735	5 / 6	1800	1600	1650	1475	1700	1550
4010 ³⁾	1880	5055	835	5 / 6	1750	1600	1600	1425	1650	1550
4310 ³⁾	1980	5355	935	5 / 6	1725	1575	1550	1375	1625	1550
4750	2125	5795	1080	5 / 6	1650	1475	1500	1325	1550	1375
5090	2245	6135	1200	5 - 3.5	1600	1425	1450	1300	1500	1325
5490	2385	6535	1340	5 - 3.5	1550	1375	1400	1250	1450	1300
5990	2570	7035	1525	5 - 3.5	1375	1225	1225	1075	1250	1100
6490	2830	7535	1785	5 - 3.5	1050	925	775	675	775	675
7000	3035	8045	1990	5 - 3.5	725	650	475	425	500	425

¹⁾ The h4 dimension without Load Backrest will decrease with 442 mm

²⁾ The h5 dimension without Load Backrest will increase with 442 mm

³⁾ Masts with h1 lower than overhead guard height (2050 mm)

h1 – Height with mast lowered

h2 – Standard free lift

h3 – Standard lift height

h4 – Height with mast raised

h5 – Full free lift

Q – Lifting capacity, rated load

Solid pneumatic tyres (SE): Front 18x7–8, rear 140/55–9

16PNT					Standard Forks		Hook-on SS		Integral SS	
h3	h1	h4 ¹⁾	h2/h5 ²⁾	Tilt angle	Single drive		Single drive		Single drive	
					Solid		Solid		Solid	
					500	600	500	600	500	600
mm	mm	mm	mm	Deg	kg	kg	kg	kg	kg	kg
Simplex										
2000 ³⁾	1480	3045	80	5 / 6	1600	1425	1600	1425	1600	1425
2560 ³⁾	1760	3605	80	5 / 6	1600	1425	1600	1425	1600	1425
2760 ³⁾	1860	3805	80	5 / 7.5	1600	1425	1600	1425	1600	1425
3000 ³⁾	1980	4045	80	5 / 7.5	1600	1425	1600	1425	1600	1425
3290	2125	4335	80	5 / 7.5	1600	1425	1600	1425	1600	1425
3530	2245	4575	80	5 / 7.5	1600	1425	1600	1425	1600	1425
3720	2385	4765	80	5 / 7.5	1600	1425	1600	1425	1600	1425
4090	2570	5135	80	5 / 7.5	1600	1425	1600	1425	1600	1425
4480	2775	5525	80	5 / 5	1600	1425	1600	1425	1600	1425
5000	3035	6045	80	5 / 5	1600	1425	1525	1350	1575	1400
5500	3285	6545	80	5 / 3.5	1500	1325	1350	1200	1400	1250
6000	3535	7045	80	5 / 3.5	1400	1250	1200	1075	1200	1075
Duplex										
2800 ³⁾	1880	3845	835	5 / 6	1600	1425	1600	1425	1600	1425
3000 ³⁾	1980	4045	935	5 / 6	1600	1425	1600	1425	1600	1425
3290	2125	4340	1080	5 / 6	1600	1425	1600	1425	1600	1425
3515	2245	4560	1200	5 / 6	1600	1425	1600	1425	1600	1425
3700	2385	4745	1340	5 / 6	1600	1425	1600	1425	1600	1425
4030	2570	5075	1525	5 / 6	1600	1425	1600	1425	1600	1425
Triplex										
3710 ³⁾	1780	4755	735	5 / 6	1600	1425	1600	1425	1600	1425
4010 ³⁾	1880	5055	835	5 / 6	1600	1425	1600	1425	1600	1425
4310 ³⁾	1980	5355	935	5 / 6	1600	1425	1600	1425	1600	1425
4750	2125	5795	1080	5 / 6	1600	1425	1550	1375	1600	1425
5090	2245	6135	1200	5 - 3.5	1600	1425	1500	1325	1550	1375
5490	2385	6535	1340	5 - 3.5	1550	1375	1400	1250	1450	1300
5990	2570	7035	1525	5 - 3.5	1450	1300	1300	1150	1300	1150
6490	2830	7535	1785	5 - 3.5	1175	1050	875	775	900	800
7000	3035	8045	1990	5 - 3.5	850	750	575	500	600	525

¹⁾ The h4 dimension without Load Backrest will decrease with 442 mm

²⁾ The h5 dimension without Load Backrest will increase with 442 mm

³⁾ Masts with h1 lower than overhead guard height (2050 mm)

h1 – Height with mast lowered

h2 – Standard free lift

h3 – Standard lift height

h4 – Height with mast raised

h5 – Full free lift

Q – Lifting capacity, rated load

Solid pneumatic tyres (SE): Front 18x7–8, rear 140/55–9

18PNT					Standard Forks		Hook-on SS		Integral SS	
h3	h1	h4 ¹⁾	h2/h5 ²⁾	Tilt	Single drive		Single drive		Single drive	
				angle	Solid		Solid		Solid	
					500	600	500	600	500	600
mm	mm	mm	mm	Deg	kg	kg	kg	kg	kg	kg
Simplex										
2000 ³⁾	1480	3045	80	5 / 6	1800	1600	1800	1600	1800	1600
2560 ³⁾	1760	3605	80	5 / 6	1800	1600	1800	1600	1800	1600
2760 ³⁾	1860	3805	80	5 / 7.5	1800	1600	1800	1600	1800	1600
3000 ³⁾	1980	4045	80	5 / 7.5	1800	1600	1800	1600	1800	1600
3290	2125	4335	80	5 / 7.5	1800	1600	1800	1600	1800	1600
3530	2245	4575	80	5 / 7.5	1800	1600	1800	1600	1800	1600
3720	2385	4765	80	5 / 7.5	1800	1600	1800	1600	1800	1600
4090	2570	5135	80	5 / 7.5	1800	1600	1750	1550	1800	1600
4480	2775	5525	80	5 / 5	1800	1600	1700	1525	1750	1550
5000	3035	6045	80	5 / 5	1750	1550	1600	1425	1650	1475
5500	3285	6545	80	5 / 3.5	1675	1500	1500	1325	1550	1375
6000	3535	7045	80	5 / 3.5	1550	1375	1275	1100	1250	1100
Duplex										
2800 ³⁾	1880	3845	835	5 / 6	1800	1600	1800	1600	1800	1600
3000 ³⁾	1980	4045	935	5 / 6	1800	1600	1800	1600	1800	1600
3290	2125	4340	1080	5 / 6	1800	1600	1800	1600	1800	1600
3515	2245	4560	1200	5 / 6	1800	1600	1800	1600	1800	1600
3700	2385	4745	1340	5 / 6	1800	1600	1800	1600	1800	1600
4030	2570	5075	1525	5 / 6	1800	1600	1750	1550	1800	1600
Triplex										
3710 ³⁾	1780	4755	735	5 / 6	1800	1600	1800	1600	1800	1600
4010 ³⁾	1880	5055	835	5 / 6	1800	1600	1750	1550	1800	1600
4310 ³⁾	1980	5355	935	5 / 6	1800	1600	1700	1525	1775	1575
4750	2125	5795	1080	5 / 6	1800	1600	1650	1475	1700	1525
5090	2245	6135	1200	5 - 3.5	1775	1575	1600	1425	1650	1475
5490	2385	6535	1340	5 - 3.5	1675	1500	1525	1350	1575	1400
5990	2570	7035	1525	5 - 3.5	1500	1325	1300	1150	1300	1150
6490	2830	7535	1785	5 - 3.5	1175	1050	875	775	900	800
7000	3035	8045	1990	5 - 3.5	850	750	600	525	600	525

¹⁾ The h4 dimension without Load Backrest will decrease with 442 mm

²⁾ The h5 dimension without Load Backrest will increase with 442 mm

³⁾ Masts with h1 lower than overhead guard height (2050 mm)

h1 – Height with mast lowered

h2 – Standard free lift

h3 – Standard lift height

h4 – Height with mast raised

h5 – Full free lift

Q – Lifting capacity, rated load

Solid pneumatic tyres (SE): Front 18x7–8, rear 140/55–9

20PNT					Standard Forks		Hook-on SS		Integral SS	
h3	h1	h4 ¹⁾	h2/h5 ²⁾	Tilt angle	Single drive		Single drive		Single drive	
					Solid		Solid		Solid	
					500	600	500	600	500	600
mm	mm	mm	mm	Deg	kg	kg	kg	kg	kg	kg
Simplex										
2000 ³⁾	1480	3045	80	5 / 6	2000	1800	2000	1800	2000	1800
2560 ³⁾	1760	3605	80	5 / 6	2000	1800	2000	1800	2000	1800
2760 ³⁾	1860	3805	80	5 / 7.5	2000	1800	2000	1800	2000	1800
3000 ³⁾	1980	4045	80	5 / 7.5	2000	1800	2000	1800	2000	1800
3290	2125	4335	80	5 / 7.5	2000	1800	2000	1800	2000	1800
3530	2245	4575	80	5 / 7.5	2000	1800	2000	1800	2000	1800
3720	2385	4765	80	5 / 7.5	2000	1800	2000	1800	2000	1800
4090	2570	5135	80	5 / 7.5	2000	1800	1950	1750	2000	1800
4480	2775	5525	80	5 / 7.5	2000	1800	1875	1700	1975	1750
5000	3035	6045	80	5 / 5	1925	1725	1800	1550	1850	1700
5500	3285	6545	80	5 / 5	1850	1650	1675	1500	1750	1550
6000	3535	7045	80	5 / 3.5	1650	1475	1475	1325	1575	1400
Duplex										
2800 ³⁾	1880	3845	835	5 / 6	2000	1800	2000	1800	2000	1800
3000 ³⁾	1980	4045	935	5 / 6	2000	1800	2000	1800	2000	1800
3290	2125	4340	1080	5 / 6	2000	1800	2000	1800	2000	1800
3515	2245	4560	1200	5 / 6	2000	1800	2000	1800	2000	1800
3700	2385	4745	1340	5 / 6	2000	1800	2000	1800	2000	1800
4030	2570	5075	1525	5 / 6	2000	1800	1950	1750	2000	1800
Triplex										
3710 ³⁾	1780	4755	735	5 / 6	2000	1800	2000	1800	2000	1800
4010 ³⁾	1880	5055	835	5 / 6	2000	1800	1950	1750	2000	1800
4310 ³⁾	1980	5355	935	5 / 6	2000	1800	1900	1700	1975	1750
4750	2125	5795	1080	5 / 6	2000	1800	1825	1650	1925	1725
5090	2245	6135	1200	5 / 6	1900	1700	1700	1525	1775	1575
5490	2385	6535	1340	5 / 6	1825	1625	1650	1475	1725	1550
5990	2570	7035	1525	5 - 3.5	1650	1475	1475	1325	1550	1375
6490	2830	7535	1785	5 - 3.5	1350	1200	1025	900	1025	900
7000	3035	8045	1990	5 - 3.5	1100	975	825	725	850	750

¹⁾ The h4 dimension without Load Backrest will decrease with 442 mm

²⁾ The h5 dimension without Load Backrest will increase with 442 mm

³⁾ Masts with h1 lower than overhead guard height (2050 mm)

h1 – Height with mast lowered

h2 – Standard free lift

h3 – Standard lift height

h4 – Height with mast raised

h5 – Full free lift

Q – Lifting capacity, rated load

Solid pneumatic tyres (SE): Front 200/50–10, rear 140/55–9

16CPN					Standard Forks		Hook-on SS		Integral SS	
h3	h1	h4 ¹⁾	h2/h5 ²⁾	Tilt angle	Single drive		Single drive		Single drive	
					Solid		Solid		Solid	
					500	600	500	600	500	600
mm	mm	mm	mm	Deg	kg	kg	kg	kg	kg	kg
Simplex										
2000 ³⁾	1480	3045	80	5 / 7.5	1600	1425	1600	1425	1600	1425
2560 ³⁾	1760	3605	80	5 / 7.5	1600	1425	1600	1425	1600	1425
2760 ³⁾	1860	3805	80	5 / 7.5	1600	1425	1600	1425	1600	1425
3000 ³⁾	1980	4045	80	5 / 7.5	1600	1425	1600	1425	1600	1425
3290	2125	4335	80	5 / 7.5	1600	1425	1600	1425	1600	1425
3530	2245	4575	80	5 / 7.5	1600	1425	1600	1425	1600	1425
3720	2385	4765	80	5 / 7.5	1600	1425	1600	1425	1600	1425
4090	2570	5135	80	5 / 7.5	1600	1425	1600	1425	1600	1425
4480	2775	5525	80	5 / 5	1600	1425	1550	1375	1600	1425
5000	3035	6045	80	5 / 5	1600	1425	1475	1300	1525	1300
5500	3285	6545	80	5 / 3.5	1550	1375	1350	1200	1350	1200
6000	3535	7045	80	5 / 3.5	1200	1075	850	850	875	875
Duplex										
2800 ³⁾	1880	3845	835	5 / 7.5	1600	1425	1600	1425	1600	1425
3000 ³⁾	1980	4045	935	5 / 7.5	1600	1425	1600	1425	1600	1425
3290	2125	4340	1080	5 / 7.5	1600	1425	1600	1425	1600	1425
3515	2245	4560	1200	5 / 7.5	1600	1425	1600	1425	1600	1425
3700	2385	4745	1340	5 / 7.5	1600	1425	1600	1425	1600	1425
4030	2570	5075	1525	5 / 7.5	1600	1425	1600	1425	1600	1425
Triplex										
3710 ³⁾	1780	4755	735	5 / 6	1600	1425	1600	1425	1600	1425
4010 ³⁾	1880	5055	835	5 / 6	1600	1425	1575	1400	1600	1425
4310 ³⁾	1980	5355	935	5 / 6	1600	1425	1550	1375	1600	1425
4750	2125	5795	1080	5 / 6	1600	1425	1475	1300	1550	1375
5090	2245	6135	1200	5 - 3.5	1600	1425	1450	1300	1500	1325
5490	2385	6535	1340	5 - 3.5	1550	1375	1375	1225	1425	1275
5990	2570	7035	1525	5 - 3.5	1275	1125	925	825	850	850
6490	2830	7535	1785	5 - 3.5	900	800	600	600	600	600
7000	3035	8045	1990	5 - 3.5	625	550	375	375	400	400

¹⁾ The h4 dimension without Load Backrest will decrease with 442 mm

²⁾ The h5 dimension without Load Backrest will increase with 442 mm

³⁾ Masts with h1 lower than overhead guard height (2050 mm)

h1 – Height with mast lowered

h2 – Standard free lift

h3 – Standard lift height

h4 – Height with mast raised

h5 – Full free lift

Q – Lifting capacity, rated load

Solid pneumatic tyres (SE): Front 18x7–8, rear 16x6–8

18CPN					Standard Forks		Hook-on SS		Integral SS	
h3	h1	h4 ¹⁾	h2/h5 ²⁾	Tilt angle	Single drive		Single drive		Single drive	
					Solid		Solid		Solid	
					500	600	500	600	500	600
mm	mm	mm	mm	Deg	kg	kg	kg	kg	kg	kg
Simplex										
2000 ³⁾	1480	3045	80	5 / 7.5	1800	1600	1800	1600	1800	1600
2560 ³⁾	1760	3605	80	5 / 7.5	1800	1600	1800	1600	1800	1600
2760 ³⁾	1860	3805	80	5 / 7.5	1800	1600	1800	1600	1800	1600
3000 ³⁾	1980	4045	80	5 / 7.5	1800	1600	1800	1600	1800	1600
3290	2125	4335	80	5 / 7.5	1800	1600	1775	1600	1800	1600
3530	2245	4575	80	5 / 7.5	1800	1600	1750	1600	1800	1600
3720	2385	4765	80	5 / 7.5	1800	1600	1725	1575	1775	1600
4090	2570	5135	80	5 / 7.5	1800	1600	1650	1525	1725	1575
4480	2775	5525	80	5 / 5	1775	1575	1600	1475	1650	1525
5000	3035	6045	80	5 / 5	1700	1550	1525	1350	1575	1450
5500	3285	6545	80	5 / 3.5	1625	1500	1350	1200	1350	1300
6000	3535	7045	80	5 / 3.5	1200	1175	875	875	875	875
Duplex										
2800 ³⁾	1880	3845	835	5 / 7.5	1800	1600	1800	1600	1800	1600
3000 ³⁾	1980	4045	935	5 / 7.5	1800	1600	1800	1600	1800	1600
3290	2125	4340	1080	5 / 7.5	1800	1600	1775	1600	1800	1600
3515	2245	4560	1200	5 / 7.5	1800	1600	1750	1600	1800	1600
3700	2385	4745	1340	5 / 7.5	1800	1600	1700	1575	1775	1600
4030	2570	5075	1525	5 / 7.5	1800	1600	1650	1525	1725	1575
Triplex										
3710 ³⁾	1780	4755	735	5 / 6	1800	1600	1700	1550	1750	1600
4010 ³⁾	1880	5055	835	5 / 6	1800	1600	1650	1525	1725	1575
4310 ³⁾	1980	5355	935	5 / 6	1775	1600	1600	1475	1675	1550
4750	2125	5795	1080	5 / 6	1725	1575	1550	1425	1600	1475
5090	2245	6135	1200	5 - 3.5	1675	1525	1500	1375	1550	1450
5490	2385	6535	1340	5 - 3.5	1625	1475	1425	1275	1425	1300
5990	2570	7035	1525	5 - 3.5	1275	1200	925	875	900	900
6490	2830	7535	1785	5 - 3.5	900	900	600	600	600	600
7000	3035	8045	1990	5 - 3.5	625	625	375	375	400	400

¹⁾ The h4 dimension without Load Backrest will decrease with 442 mm

²⁾ The h5 dimension without Load Backrest will increase with 442 mm

³⁾ Masts with h1 lower than overhead guard height (2050 mm)

h1 – Height with mast lowered

h2 – Standard free lift

h3 – Standard lift height

h4 – Height with mast raised

h5 – Full free lift

Q – Lifting capacity, rated load

Solid pneumatic tyres (SE): Front 18x7–8, rear 16x6–8

16PN					Standard Forks		Hook-on SS		Integral SS	
h3	h1	h4 ¹⁾	h2/h5 ²⁾	Tilt angle	Single drive		Single drive		Single drive	
					Solid		Solid		Solid	
					500	600	500	600	500	600
mm	mm	mm	mm	Deg	kg	kg	kg	kg	kg	kg
Simplex										
2000 ³⁾	1480	3045	80	5 / 7.5	1600	1425	1600	1425	1600	1425
2560 ³⁾	1760	3605	80	5 / 7.5	1600	1425	1600	1425	1600	1425
2760 ³⁾	1860	3805	80	5 / 7.5	1600	1425	1600	1425	1600	1425
3000 ³⁾	1980	4045	80	5 / 7.5	1600	1425	1600	1425	1600	1425
3290	2125	4335	80	5 / 7.5	1600	1425	1600	1425	1600	1425
3530	2245	4575	80	5 / 7.5	1600	1425	1600	1425	1600	1425
3720	2385	4765	80	5 / 7.5	1600	1425	1600	1425	1600	1425
4090	2570	5135	80	5 / 7.5	1600	1425	1600	1425	1600	1425
4480	2775	5525	80	5 / 5	1600	1425	1575	1400	1600	1425
5000	3035	6045	80	5 / 5	1600	1425	1500	1325	1600	1425
5500	3285	6545	80	5 / 3.5	1600	1425	1350	1200	1525	1350
6000	3535	7045	80	5 / 3.5	1325	1175	850	850	1025	900
Duplex										
2800 ³⁾	1880	3845	835	5 / 7.5	1600	1425	1600	1425	1600	1425
3000 ³⁾	1980	4045	935	5 / 7.5	1600	1425	1600	1425	1600	1425
3290	2125	4340	1080	5 / 7.5	1600	1425	1600	1425	1600	1425
3515	2245	4560	1200	5 / 7.5	1600	1425	1600	1425	1600	1425
3700	2385	4745	1340	5 / 7.5	1600	1425	1600	1425	1600	1425
4030	2570	5075	1525	5 / 7.5	1600	1425	1600	1425	1600	1425
Triplex										
3710 ³⁾	1780	4755	735	5 / 6	1600	1425	1600	1425	1600	1425
4010 ³⁾	1880	5055	835	5 / 6	1600	1425	1600	1425	1600	1425
4310 ³⁾	1980	5355	935	5 / 6	1600	1425	1575	1400	1600	1425
4750	2125	5795	1080	5 / 6	1600	1425	1525	1350	1575	1400
5090	2245	6135	1200	5 - 3.5	1600	1425	1475	1300	1525	1350
5490	2385	6535	1340	5 - 3.5	1600	1425	1425	1275	1400	1250
5990	2570	7035	1525	5 - 3.5	1400	1250	1050	925	1050	925
6490	2830	7535	1785	5 - 3.5	1025	900	725	650	750	650
7000	3035	8045	1990	5 - 3.5	750	650	500	425	500	400

¹⁾ The h4 dimension without Load Backrest will decrease with 442 mm

²⁾ The h5 dimension without Load Backrest will increase with 442 mm

³⁾ Masts with h1 lower than overhead guard height (2050 mm)

h1 – Height with mast lowered

h2 – Standard free lift

h3 – Standard lift height

h4 – Height with mast raised

h5 – Full free lift

Q – Lifting capacity, rated load

Solid pneumatic tyres (SE): Front 18x7–8, rear 16x6–8

18PN					Standard Forks		Hook-on SS		Integral SS	
h3	h1	h4 ¹⁾	h2/h5 ²⁾	Tilt angle	Single drive		Single drive		Single drive	
					Solid		Solid		Solid	
					500	600	500	600	500	600
mm	mm	mm	mm	Deg	kg	kg	kg	kg	kg	kg
Simplex										
2000 ³⁾	1480	3045	80	5 / 7.5	1800	1600	1800	1600	1800	1600
2560 ³⁾	1760	3605	80	5 / 7.5	1800	1600	1800	1600	1800	1600
2760 ³⁾	1860	3805	80	5 / 7.5	1800	1600	1800	1600	1800	1600
3000 ³⁾	1980	4045	80	5 / 7.5	1800	1600	1800	1600	1800	1600
3290	2125	4335	80	5 / 7.5	1800	1600	1800	1600	1800	1600
3530	2245	4575	80	5 / 7.5	1800	1600	1800	1600	1800	1600
3720	2385	4765	80	5 / 7.5	1800	1600	1800	1600	1800	1600
4090	2570	5135	80	5 / 7.5	1800	1600	1750	1575	1800	1600
4480	2775	5525	80	5 / 5	1800	1600	1700	1525	1750	1600
5000	3035	6045	80	5 / 5	1775	1575	1625	1450	1675	1500
5500	3285	6545	80	5 / 3.5	1725	1525	1525	1350	1525	1350
6000	3535	7045	80	5 / 3.5	1325	1175	1025	900	1025	1000
Duplex										
2800 ³⁾	1880	3845	835	5 / 7.5	1800	1600	1800	1600	1800	1600
3000 ³⁾	1980	4045	935	5 / 7.5	1800	1600	1800	1600	1800	1600
3290	2125	4340	1080	5 / 7.5	1800	1600	1800	1600	1800	1600
3515	2245	4560	1200	5 / 7.5	1800	1600	1800	1600	1800	1600
3700	2385	4745	1340	5 / 7.5	1800	1600	1800	1600	1800	1600
4030	2570	5075	1525	5 / 7.5	1800	1600	1750	1575	1800	1600
Triplex										
3710 ³⁾	1780	4755	735	5 / 6	1800	1600	1800	1600	1800	1600
4010 ³⁾	1880	5055	835	5 / 6	1800	1600	1750	1550	1800	1600
4310 ³⁾	1980	5355	935	5 / 6	1800	1600	1700	1525	1775	1600
4750	2125	5795	1080	5 / 6	1800	1600	1650	1475	1700	1525
5090	2245	6135	1200	5 - 3.5	1750	1550	1600	1425	1650	1475
5490	2385	6535	1340	5 - 3.5	1700	1525	1500	1325	1450	1300
5990	2570	7035	1525	5 - 3.5	1400	1250	1075	950	1075	950
6490	2830	7535	1785	5 - 3.5	1025	900	725	650	750	750
7000	3035	8045	1990	5 - 3.5	750	675	500	475	500	500

¹⁾ The h4 dimension without Load Backrest will decrease with 442 mm

²⁾ The h5 dimension without Load Backrest will increase with 442 mm

³⁾ Masts with h1 lower than overhead guard height (2050 mm)

h1 – Height with mast lowered

h2 – Standard free lift

h3 – Standard lift height

h4 – Height with mast raised

h5 – Full free lift

Q – Lifting capacity, rated load

Solid pneumatic tyres (SE): Front 18x7–8, rear 16x6–8

20PN					Standard Forks		Hook-on SS		Integral SS	
h3	h1	h4 ¹⁾	h2/h5 ²⁾	Tilt angle	Single drive		Single drive		Single drive	
					Solid		Solid		Solid	
					500	600	500	600	500	600
mm	mm	mm	mm	Deg	kg	kg	kg	kg	kg	kg
Simplex										
2000 ³⁾	1480	3045	80	5 / 7.5	2000	1800	2000	1800	2000	1800
2560 ³⁾	1760	3605	80	5 / 7.5	2000	1800	2000	1800	2000	1800
2760 ³⁾	1860	3805	80	5 / 7.5	2000	1800	2000	1800	2000	1800
3000 ³⁾	1980	4045	80	5 / 7.5	2000	1800	2000	1800	2000	1800
3290	2125	4335	80	5 / 7.5	2000	1800	2000	1800	2000	1800
3530	2245	4575	80	5 / 7.5	2000	1800	2000	1800	2000	1800
3720	2385	4765	80	5 / 7.5	2000	1800	1950	1800	2000	1800
4090	2570	5135	80	5 / 7.5	2000	1800	1900	1750	1975	1800
4480	2775	5525	80	5 / 7.5	2000	1800	1825	1700	1925	1775
5000	3035	6045	80	5 / 5	1925	1775	1750	1625	1825	1700
5500	3285	6545	80	5 / 5	1850	1650	1600	1425	1600	1500
6000	3535	7045	80	5 / 3.5	1750	1575	1375	1225	1375	1300
Duplex										
2800 ³⁾	1880	3845	835	5 / 7.5	2000	1800	2000	1800	2000	1800
3000 ³⁾	1980	4045	935	5 / 7.5	2000	1800	2000	1800	2000	1800
3290	2125	4340	1080	5 / 7.5	2000	1800	2000	1800	2000	1800
3515	2245	4560	1200	5 / 7.5	2000	1800	1975	1800	2000	1800
3700	2385	4745	1340	5 / 7.5	2000	1800	1950	1800	2000	1800
4030	2570	5075	1525	5 / 7.5	2000	1800	1900	1750	1975	1800
Triplex										
3710 ³⁾	1780	4755	735	5 / 6	2000	1800	1950	1750	2000	1800
4010 ³⁾	1880	5055	835	5 / 6	2000	1800	1900	1725	1975	1800
4310 ³⁾	1980	5355	935	5 / 6	2000	1800	1850	1700	1925	1775
4750	2125	5795	1080	5 / 6	1950	1800	1775	1650	1875	1725
5090	2245	6135	1200	5 / 6	1900	1750	1725	1600	1800	1675
5490	2385	6535	1340	5 / 6	1850	1700	1500	1400	1450	1450
5990	2570	7035	1525	5 - 3.5	1775	1575	1450	1300	1425	1425
6490	2830	7535	1785	5 - 3.5	1325	1300	1025	1000	1025	1025
7000	3035	8045	1990	5 - 3.5	1000	1000	700	700	725	725

¹⁾ The h4 dimension without Load Backrest will decrease with 442 mm

²⁾ The h5 dimension without Load Backrest will increase with 442 mm

³⁾ Masts with h1 lower than overhead guard height (2050 mm)

h1 – Height with mast lowered

h2 – Standard free lift

h3 – Standard lift height

h4 – Height with mast raised

h5 – Full free lift

Q – Lifting capacity, rated load

Solid pneumatic tyres (SE): Front 200/50–10, rear 16x6–8